
# Accio 600 mm Manhole Cover and Frame

Technical Guide D16.2

With the call for larger opening and safer access manhole covers and frames, Hynds have introduced the Uber Accio Ductile Iron 600 mm clear opening unit.

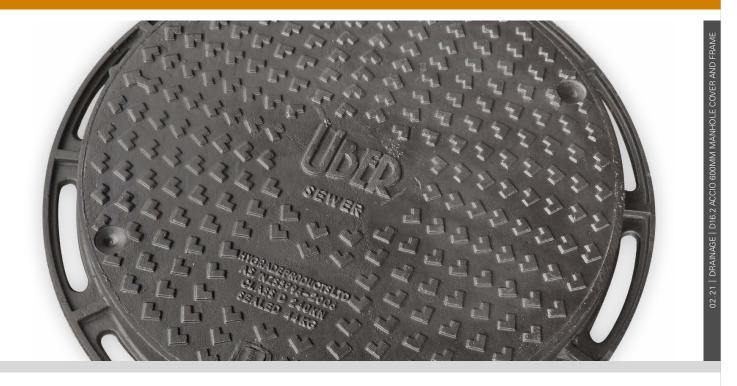

## **Applications**

Where gas, air and water tightness are a concern, the Accio DI multipurpose cover and frame meets all needs

#### **Product Attributes**

Lightweight

Made from ductile iron grade 500/7

Up to 40% lighter than cast iron

Locking and sealed

Protects against theft & unwanted entry

## Approvals/Standards

Complies with AS3996:2006 Class B & D

# Quality

ISO 9001:2008 Quality Management



With the call for larger opening and safer access manhole covers and frames, Hynds have introduced the Uber Accio Ductile Iron 600 mm clear opening unit.

#### Installation

Flat based frame makes for easy installation on chamber lid. Frame flange is slotted to allow for anchoring.

### **Testing**

Tested in accordance with AS 3996:2006 to class D240 *(24 tonne)*. Meets requirement of HN-HO-72 transit requirement.

# **Durability**

Manufactured from spheroidal graphite cast (S.G or Ductile Iron) in (Grade 500-7) in accordance with ISO 1083.

Hynds code	Description
DIMHSTCF500	500mm Class D Multipurpose
DIMHSTSCFB	600mm Class B Sewer
DIMHSTSTFCB	600mm Class B Stormwater
DIMHSTSCFD	600mm Class D Sewer
DIMHSTSTCFD	600mm Class D Stormwater





Branches Nationwide Support Office & Technical Services 09 274 0316

**Disclaimer:** While every effort has been made to ensure that the information in this document is correct and accurate, users of Hynds product or information within this document must make their own assessment of suitability for their particular application. Product dimensions are nominal only, and should be verified if critical to a particular installation. No warranty is either expressed, implied, or statutory made by Hynds unless expressly stated in any sale and purchase agreement entered into between Hynds and the user.

