


uPVC Culvert



550.225.6

ID (mm)	Length (m)
100, 150, 175, 225, 300, 375, 475	3, 5, 6

Land Drainage

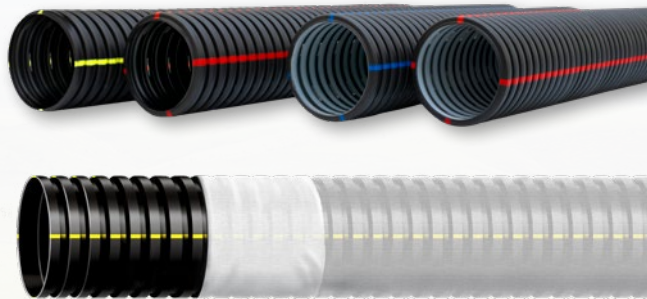

Code Structure

400.065.100FS

Wall type	OD (mm)	Coil size (m)	Special variant
Single Wall - Corrugated			
400 - Single Wall Punched	65 -	15, 30, 50, 150	FS - Filtersock
500 - Single Wall Unpunched	110 -	15, 30, 50, 100, 450	HD - Heavy Duty SN10
	160 -	15, 45	HDFS - Heavy Duty with Filtersock
Twin Wall - Smooth			
420/NEXF - Punched	110 -	15, 30, 50, 100, 450	FS - Filtersock
520/NEXC - Unpunched	160 -	45, 185	HD - Heavy Duty SN10
	200 -	29, 120	HDFS - Heavy Duty with Filtersock

Flexible Culvert and Flume

Culvert pipe

Hynds code	ID (mm)	Length (m)
LP400.3700	400	3.7
LP400.6600	400	6.6
LP600.3800	600	3.8

Fluming

Hynds code	ID (mm)	Length (m)
LP400.3700F	400	3.7
LP600.3800F	600	3.8



Waters & Farr FlumeBoss



- Made in NZ
- Twin walled
- Smooth bore
- Strong and durable
- 6 metre effective length

550.225.6FBFL

ID size of pipe Length of pipe FlumeBoss Code

Flumeboss can be used in a variety of applications, from water diversion to feed.

*Larger twin wall diameters available on request.

ID (mm)	OD (mm)	Weight (kg)
225	259	9
300	353	17
375	442	26
450	531	35.5

Installation

Different culvert types require various methods of installation and backfill. For longevity and to reduce the risk of culvert washout refer to our guideline by scanning the QR code.



Scan here

HYNDS
RURAL

hyndsrural.co.nz

Version 2 Dec 24

HYNDS
RURAL

Land Drainage Brochure



PKS Supaduct Rural



- Environmentally friendly
- Strong & lightweight
- Easy installation
- Made in NZ

PK500SUPA.SN4

ID size of pipe

SN rating

Supaduct Rural is sold by Internal Diameter (ID), giving you clear insight to the flow capacity you can expect. Additionally, our culverts come in 5.8m effective length and an SN-rated collar, maximising your overall length to 6m nominal. Available in SN8 and SN16 upon request.

Standard sizes

ID (mm)	OD (mm)	Weight (kg)
500	574	96
600	674	114
700	794	160
800	894	182
900	1020	225
1000	1120	250
1100	1226	331
1200	1366	457
1400	1566	520
1500	1670	583
1660	1898	660
1800	2038	713
2000	2250	1088
2500	2778	1662

Waters & Farr FarmBoss®



- Strong & lightweight
- Easy installation
- Made in NZ
- Safer handling
- Environmentally friendly

550.225.6FBBS

ID size of pipe

Length

FarmBoss® code

FarmBoss® is typically rated SN6 and is supplied in 6 metre lengths. Light weight, but still strong and durable.

ID (mm)	OD (mm)	Weight (kg)
225	259	18
300	353	34
375	442	52
450	531	71

Layflat Culvert Sock



Order in - sold by the metre. Any length up to 50m. Larger bespoke diameters available on request.

Diameter (mm)	Single cleat	Double cleat	Clamp code
150	FC150		FC150C
225	FC225		FC225C
300	FC300	FCD300	FC300C
375	FC375	FCD375	FC375C
450	FC450	FCD450	FC450C
525	FC525	FDC600	FC525C
600	FC600	FCD675	FC600C
750	FC750	FCD750	FC750C

Farm Grade Concrete Culvert



Size range from ID Ø225mm - Ø2550mm

Hynds manufactures a range of reinforced concrete pipe. Our farm grade 'Hydrain' pipe is our seconds culvert range. Nominal length of 2.5m and is subject to availability.

Wingwalls



For culvert inlets and outlets designed to minimise mass and protect against erosion.

Hynds code	Suits pipe size (mm)
WW0300N	Ø300
WW0600	Ø375 - Ø675
WW1050	Ø675 - Ø1050
WW1350	Ø1200 - Ø1350
WW1800	Ø1600 - Ø1800