

Specialised Access Solutions



Product Catalogue 2026





CONTENTS

HEMATIC MACHINED MODULAR SOLUTION

Project Applications	7
----------------------	---

CLASS B COVERS

CLASS B Infill Covers	10
CLASS B Solid Top Covers	11
CLASS B Decorative Edge Covers	11

CLASS D COVERS

CLASS D Infill Covers	13
CLASS D Solid Top Covers	14

CLASS G COVERS

CLASS G Solid Top Covers	16
--------------------------	----

CLASS D TWO & THREE PART COVERS

CLASS D Infill Covers	18
CLASS D Solid Top Covers	19

CLASS G TWO & THREE PART COVERS

CLASS G Infill Covers	21
CLASS G Solid Top Covers	22

HINGED LIFT ASSIST COVERS

CLASS D Hinged Lift Assist Covers	24
CLASS G Hinged Lift Assist Covers	25

CIRCULAR COVERS AND GRATES

Circular Covers and Grates	26
----------------------------	----

GRATES

Sump Grates	29
CLASS D Sump Grates	
CLASS G Sump Grates	
Trench Grates	30
CLASS D Trench Grates	
CLASS G Trench Grates	

SERVICE BOXES

Service Boxes	32
---------------	----

ACCESSORIES

Lifters & Keys	34
Keyhole plugs	35



ABOUT HYNDS

New Zealand's premier product supplier for the management of water and water-based waste. Supplying New Zealand's infrastructure through innovation and partnership.

Overview

Established in 1973 Hynds Limited is a large privately owned New Zealand manufacturer and distributor of products for the management of water and water-based waste in the civil and rural infrastructure industry.

Hynds Pipe Systems is the largest operating unit in the group with seven production plants manufacturing spun and precast concrete products; a nationwide network of 35 merchant branches; a fleet of over 70 trucks, and over 40,000 product lines available.

Commitment to quality management and accredited operating systems

Hynds maintains an independently audited third party accreditation for the ISO9001 certified quality management systems, and follow founding policies that underpin commitment and performance outcomes to achieve our organisational vision and values. 'S' Mark accreditation is maintained by regular audits.

We also require the same quality commitment from our global suppliers for castings and composite products.

How To Find Us

For information about any product not shown in this catalogue, please do not hesitate to contact your nearest Hynds Branch or phone 0800 WE PIPE (93 7473)

Further information and our full comprehensive range of product can be viewed on www.hynds.co.nz



NEW

PRODUCT



THE ERMATIC®

Engineered for excessive loads and frequent need for access

The ERMATIC® custom modular multiple cover system is a highly engineered range of access covers designed for a wide variety of underground services. It is engineered to perform in tough environments where excessive loads and frequent need for access are par for the course. With every unique customer project / application, we offer

a range of standard solutions, solid top, and infill, single and multipart, and in different load class options.

The covers and beams are removable, yielding a full clear opening. The ERMATIC range leverages the global engineering and design experience within EJ to enhance ergonomic design and security.



ERMATIC MACHINED MODULAR SOLUTION

ERGONOMICS - EASE OF ACCESS

ERMATIC modular solutions keeps workers safe. They're designed for easy handling and feature ergonomically designed lift handles and optional assist lift covers. Removable I-beams provide unobstructed access to large clear openings.

ULTIMATE PROTECTION

The ERMATIC modular solution keeps underground structures secure. These solutions are quiet—precisely machined surfaces fit tightly together, reducing movement under traffic conditions and protecting against damage and debris or aggressive chemicals for underground vaults/trenches. Designers are also able to conceal underground services as the covers can be ordered with the options of concrete infill or pavers to allow blending with the surrounding groundwork.

PROJECT APPLICATIONS

- Sewerage: inspection pits for sludge chambers, access shafts for large plants, etc.
- Telecommunications: cable jointing chambers, etc.
- Utility: gas mains/water mains
- Electrical: lighting, signals, transformer pits, cable joint boxes, etc.

PROJECT ENVIRONMENTS

- Airports and ports
- Railways
- Tunnels
- Power stations
- Water treatment and purification plants
- Manufacturing plants
- Exhibition centers, leisure parks, stadiums, and other public arenas

The ERMATIC range of modular covers are manufactured in the EJ Picardie, French foundry.



Hynds supplies a range of Streetware products that meet the requirements of recognised International Standards such as AS3996 and EN124, while also achieving the needs of Transit NZ's HN-HO-72.

The table below lists the ultimate design load capabilities of the AS3996:2019 Standard.

A small range of streetware products are designed to Standard EN124. For loading information on EN124, please contact Hynds for more information.

Load Classes

Australian Standard AS3996:2019

Type	Class	Typical use	Nominal wheel loading (kg)	Serviceability design load (kN)	Ultimate limit state design (kN)
	A	Areas accessible strictly by pedestrians. Not suited to vehicles. Example - residential walkways not accessible by vehicles.	330	6.7	10
	B	Private and shared residential property. Suitable for vehicles accessing driveways and footpaths. Low speed only. Example - residential driveways, cycle trails, residential car parks.	2,670	53	80
	C	Residential roads and car parks trafficable to vehicles. Example - areas with slow moving traffic such as carparks.	5,000	100	150
	D	Major roads in residential areas. Meets HN-HO-72 requirements. Example - major roads, carparks.	8,000	160	240
	E	Arterial roads and motorways. Suitable for all heavy vehicles. Example - motorways, loading docks, warehouses.	13,700	267	400
	F	Loading docks, wharves and airport service taxiways. Example - heavy and high traffic volumes.	20,000	400	600
	G	Airport runways and taxiways, wharves. Example - very heavy loading and high traffic volumes.	30,000	600	900

NOTE :

Loadings are a guide only and don't take into account specific forces and vehicle configurations. If in doubt please contact Hynds regarding clarification and recommendation for the best product to suit your requirements.



CLASS B COVERS

A range of solutions designed for lightly trafficked applications such as footpaths and pedestrian areas.



CLASS B COVERS

Hynds offer a wide selection of Class B covers available as infill, solid top, or decorative edge. These covers are designed for lightly trafficked areas and for building interiors such as shopping malls or office buildings.

If you are uncertain as to the adequacy of covers conforming to a particular loading, it is recommended to use a cover from a higher loading class.

Note: For lid lifters suitable for the standard key holes of these covers, refer to page 32.

- Meets the requirements of AS3996:2019
- Manufactured from over 90% recycled materials
- Precision machined to seal against gas, air, and water ingress or egress
- Close tolerances to eliminate movement
- Bolt down capability for security

CLASS B Infill Covers

These covers are recessed for concrete infill which makes them the perfect solution for providing a surface which can be made to blend into a surrounding area. The surface finish will dictate the skid resistance for the cover. All recessed covers are designed with cross-ribs to increase strength.



FIG. 1 DICIF6060B

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DICIF6045B	Cover DI 600 x 450mm Infill	600	450	810	562	55	50
DICIF6060B	Cover DI 600 x 600mm Infill	600	600	810	712	55	68
DICIF7560B	Cover DI 750 x 600mm Infill	750	600	958	712	55	75
DICIF7575B	Cover DI 750 x 750mm Infill	750	750	958	862	55	85
DICIF9060B	Cover DI 900 x 600mm Infill	900	600	1110	712	55	95
DICIF9090B	Cover DI 900 x 945mm Infill	900	900	1110	1012	55	125

CLASS B SOLID TOP COVERS

These solid top covers are lighter in weight than concrete infilled covers. They feature a textured anti-slip surface designed for maximum performance in all weather conditions. The 4L is a patented design and achieves a P5 anti-slip rating.



FIG. 4 DICST6060B



FIG. 5 DICST7560B




FIG. 6 DICST7575B

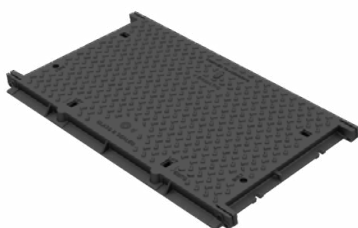


FIG. 7 DICST9060B



FIG. 8 DICST9090B

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DICST6045B	Cover DI 600 x 450mm Solid Top	600	450	810	562	55	49
DICST6060B	Cover DI 600 x 600mm Solid Top	600	600	648	710	55	66
DICST7560B	Cover DI 750 x 600mm Solid Top	750	600	900	709	55	78
DICST7575B	Cover DI 750 x 750mm Solid Top	750	750	958	862	55	93
DICST9060B	Cover DI 900 x 600mm Solid Top	900	600	1110	712	55	84
DICST9090B	Cover DI 900 x 900mm Solid Top	900	900	1110	1012	55	125

CLASS B DECORATIVE EDGE COVERS

Decorative edged covers are the ideal solution for design sensitive applications and high-profile architectural spaces. The stainless-steel edging on the covers provide durability and a clean finish.



FIG. 2 DICDESS3030B12



FIG. 3 DICDESS6060B12

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DICDESS3030B12	Cover DI 312 x 312mm Infill B 12mm SS Edged	312	312	462	422	67	26
DICDESS6060B12	Cover DI 612 x 612mm Infill B 12mm SS Edged	612	612	762	722	67	56

- More sizes are available on request.
- These decorative edge covers are available in a range of heights: 12, 24, 50, 60mm

CLASS D COVERS

A range of recessed concrete infill and solid top cover solutions designed for roadways, loading and parking areas, and suitable for most types of vehicles. Rated for loads up to HN-HO-72.



CLASS D COVERS

The Class D range of infill and solid top cover solutions are designed for use in most traffickable locations.

If you are uncertain as to the adequacy of covers conforming to a particular loading, it is recommended to use a cover from a higher loading class.

Note: For lid lifters suitable for the standard key holes of these covers, refer to page 32.

- Meets the requirements of AS3996:2019
- Manufactured from over 90% recycled materials
- Precision machined to seal against gas, air, and water ingress or egress
- Close tolerances to eliminate movement
- Bolt down capability for security

CLASS D INFILL COVERS

These covers are recessed for concrete infill which makes them the perfect solution for providing a surface which can be made to blend into a surrounding area. The surface finish will dictate the skid resistance for the cover. All recessed covers are designed with cross-ribs to increase strength.



FIG. 9 DICIF6060D

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DICIF6045D	Cover DI 600 x 450mm Infill	600	450	803	562	77	82
DICIF6060D	Cover DI 600 x 600mm Infill	600	600	800	712	77	95
DICIF7560D	Cover DI 750 x 600mm Infill	750	600	954	712	77	112
DICIF7575D	Cover DI 750 x 750mm Infill	750	750	954	954	77	125
DICIF9060D	Cover DI 900 x 600mm Infill	900	600	1103	712	77	131
DICIF9090D	Cover DI 900 x 900mm Infill	900	900	1103	1012	77	172
DICIF1260D	Cover DI 1200 x 600mm Infill	1200	600	1404	712	77	180
DICIF1212D	Cover DI 1200 x 1200mm Infill	1200	1200	1404	1332	77	336

CLASS D SOLID TOP COVERS

These solid top covers are lighter in weight than concrete infilled covers. They feature a textured anti-slip surface designed for maximum performance in all weather conditions. The 4L is a patented design and achieves a P5 anti-slip rating.

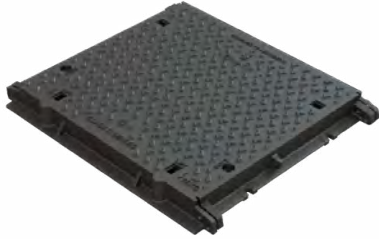


FIG. 10 DICST6060D

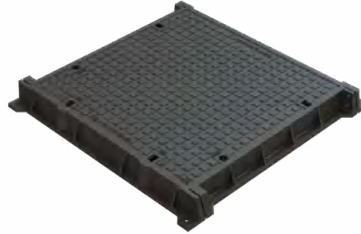


FIG. 11 DICST7575D



FIG. 12 DICST9060D

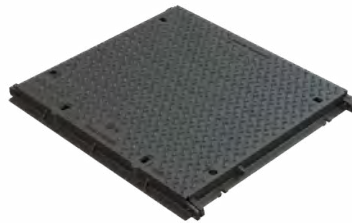


FIG. 13 DICST9090D

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DICST6060D	Cover DI 600 x 600mm Solid Top	600	600	812	812	100	115
DICST7560D	Cover DI 750 x 600mm Solid Top	750	600	830	812	100	130
DICST7575D	Cover DI 750 x 750mm Solid Top	750	750	962	962	100	145
DICST9060D	Cover DI 900 x 600mm Solid Top	904	611	1101	712	100	135
DICST9090D	Cover DI 900 x 900mm Solid Top	900	900	1112	1112	100	192
DICST1260D	Cover DI 1200 x 600mm Solid Top	1200	600	1300	836	125	245

CLASS G COVERS

A range of recessed concrete infill and solid top cover solutions designed for very heavy loading and high traffic volume applications such as loading docks, wharves, and airport taxiways.



CLASS G COVERS

The Class G range of recessed concrete infill and solid top cover solutions are designed for extra heavy loadings and high traffic volume applications including wharves and airports.

Note:

- For lid lifters suitable for the standard key holes of these covers, refer to page 32.
- Class G Infill covers are only available as a made to order items. Lead time approx. 3 - 5 months.

- Meets the requirements of AS3996:2019
- Manufactured from over 90% recycled materials
- Precision machined to seal against gas, air, and water ingress or egress
- Close tolerances to eliminate movement
- Bolt down capability for security

CLASS G SOLID TOP COVERS

These solid top covers are lighter in weight than concrete infilled covers. They feature a textured anti-slip surface designed for maximum performance in all weather conditions. The 4L is a patented design and achieves a P5 anti-slip rating.

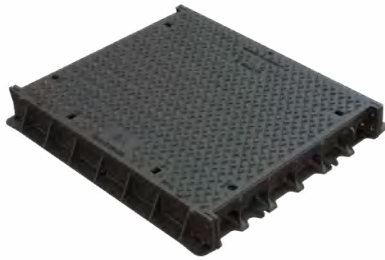


FIG. 15 DICST6060G

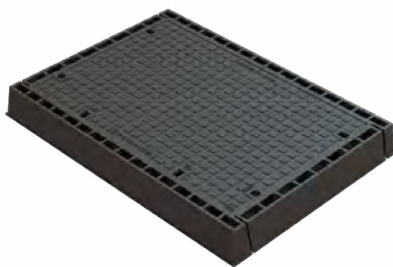


FIG. 16 DICST9060G


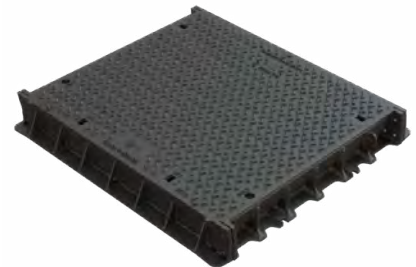


FIG. 17 DICST9090G

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DICST6060G	Cover DI 600 x 600mm Solid Top	600	600	823	773	150	160
DICST9060G	Cover DI 900 x 600mm Solid Top	900	600	1123	773	150	249
DICST9090G	Cover DI 900 x 900mm Solid Top	900	900	1123	1073	150	310

CLASS D MULTIPART COVERS

Multipart covers give you the ability to cover a larger size opening while still retaining adequate load ratings. As these are infill covers, they can be matched to the surroundings. In the larger sizes, removable beams may be used to span the opening and maintain the load rating.

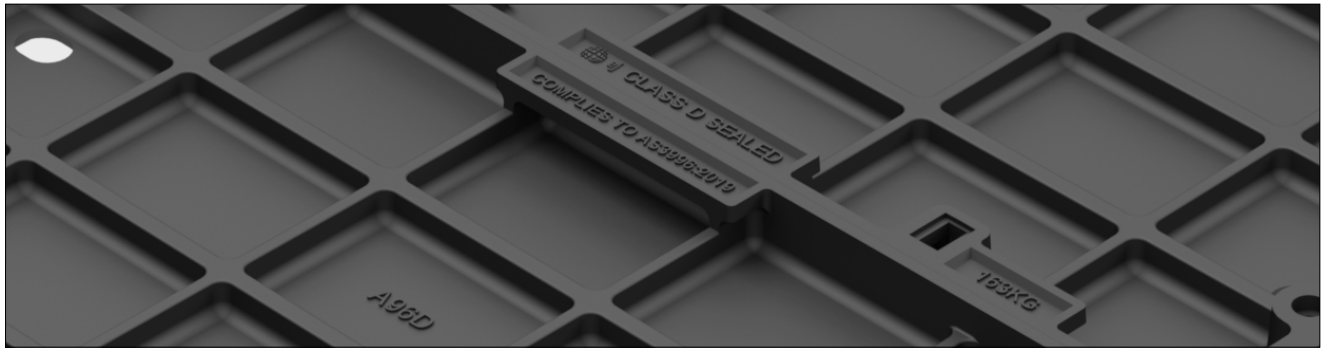

CLASS D TWO & THREE PART COVERS

Multipart covers give you the ability to cover a large size opening while still retaining adequate load ratings. These covers are designed to be opened and reinstalled in sequence. This needs to be considered during the system design so that access for lifting equipment can be maintained.

As multipart access covers come in small sections, they are easier to remove and gain access to specific parts in an underground chamber. This can be useful if only an inspection is required rather than full access for maintenance.

Note: For lid lifters suitable for the standard key holes of these covers, refer to page 32.

- Meets the requirements of AS3996:2019
- Manufactured from over 90% recycled materials
- Close tolerances to eliminate movement
- Bolt down capability for security
- Removable beams for full access

CLASS D INFILL COVERS

These covers are recessed for concrete infill which makes them the perfect solution for providing a surface which can be made to blend into a surrounding area. The surface finish will dictate the skid resistance for the cover. All recessed covers are designed with cross-ribs to increase strength.



FIG. 18 DICIF6012D



FIG. 19 DICIF6019D



FIG. 20 DICIF9012D

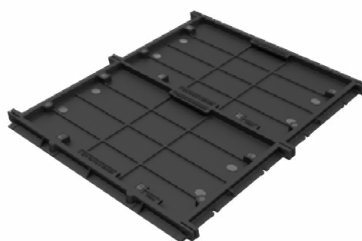


FIG. 21 DICIF1212D

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DICIF6012D	Cover DI 600 x 1220mm 2 Part Infill	600	1220	803	1332	77	175
DICIF6019D	Cover DI 600 x 1940mm 3 Part Infill	600	1940	812	2152	100	300
DICIF9012D	Cover DI 915 x 1220mm 2 Part Infill	915	1220	1103	1332	77	270
DICIF1212D	Cover DI 1200 x 1290mm 2 Part Infill	1200	1290	1436	1526	125	520

Many more size options by request.

CLASS D SOLID TOP COVERS

These solid top covers are lighter in weight than concrete infilled covers. They feature a textured anti-slip surface designed for maximum performance in all weather conditions.

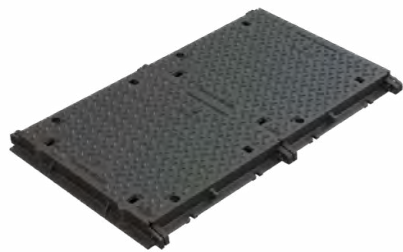


FIG. 22 DICST6012D

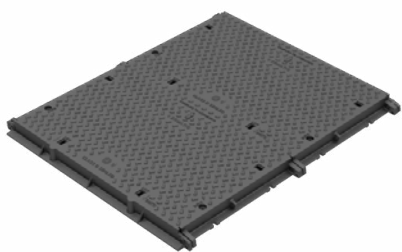


FIG. 23 DICST9012D

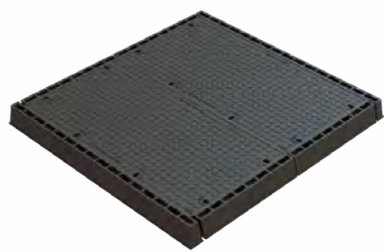


FIG. 24 DICST1212D

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DICST6012D	Cover DI 600 x 1270mm 2 Part Solid Top	600	1270	812	1482	100	244
DICST9012D	Cover DI 915 x 1270mm 2 Part Solid Top	915	1270	1110	1480	100	275
DICST1212D	Cover DI 1200 x 1290mm 2 Part Solid Top	1200	1290	1436	1526	125	585



CLASS G MULTIPART COVERS

Hynds offer a range of Multipart covers that meet Class G loading requirements for Airports and Ports. These covers are available as Infill or Solid Top to suit a variety of clear opening sizes.



CLASS G TWO & THREE PART COVERS

Multipart covers give you the ability to cover a large size opening while still retaining adequate load ratings. These covers are designed to be opened and reinstalled in sequence. This needs to be considered during the system design so that access for lifting equipment can be maintained.

As multipart access covers come in small sections, they are easier to remove and gain access to specific parts in an underground chamber. This can be useful if only an inspection is required rather than full access for maintenance.

Note: For lid lifters suitable for the standard key holes of these covers, refer to page 32.

- Meets the requirements of AS3996:2019
- Manufactured from over 90% recycled materials
- Close tolerances to eliminate movement
- Bolt down capability for security
- Removable beams for full access

CLASS G INFILL COVERS

These covers are recessed for concrete infill which makes them the perfect solution for providing a surface which can be made to blend into a surrounding area. The surface finish will dictate the skid resistance for the cover. All recessed covers are designed with cross-ribs to increase strength.



FIG. 25 DICIF6019G



FIG. 26 DICIF9090G




FIG. 27 DICIF9012G

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DICIF6019G	Cover DI 600 x 1980mm 3 Part Infill	600	1980	836	2216	125	636
DICIF9090G	Cover DI 900 x 900mm 2 Part Infill	915	990	1151	1226	125	420
DICIF9012G	Cover DI 915 x 1290mm 2 Part Infill	915	1290	1151	1526	125	470

CLASS G **SOLID TOP COVERS**

This solid top multipart cover comes in a 2-part design. Solid top covers are lighter in weight than concrete infilled covers. They feature a textured anti-slip surface designed for maximum performance in all weather conditions.



Glass G TWO-& THREE-PART solid top covers are available in a range of modular sizes on a “made to order” basis.

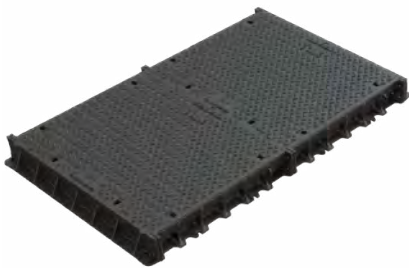


FIG. 28 DICST9012G

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DICST9012G	Cover DI 915 x 1290mm 2 Part Solid Top	915	1290	1151	1526	125	470

HINGED LIFT ASSIST COVERS

For ease of access, Hynds offer a range of Hinged Lift Assist Covers in Class D and Class G. A mechanical spring is used to reduce the lifting weight of the cover as low as 16kg. This allows frequent access with only hand tools.



HINGED LIFT ASSIST COVERS

Hinged Lift Assist covers feature a mechanical spring strut that significantly reduces the lifting effort required to open the cover compared to traditional solid top or infill covers.

These are ideal covers when frequent access is required and heavy loadings are expected.

- Spring assist
- Meets the requirements of AS3996:2019
- Manufactured from over 90% recycled materials

CLASS D HINGED LIFT ASSIST COVERS

Class D Hinged Lift Assist Covers are ideal for use in roadways and carparks where quick ease of access is required.



FIG. 31 D1CLFA9090D



FIG. 32 D1CLFA1212D

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
D1CLFA9090D	Cover DI 914 x 914mm Hinged Lift Assist	914	914	1146	1146	127	250
D1CLFA1212D	Cover DI 1219 x 1219mm Hinged Lift Assist	1219	1219	1428	1428	152	415

CLASS G HINGED LIFT ASSIST COVERS

Class G Hinged Lift Assist Covers are ideal for use in airports and ports where ready access to underground infrastructure is required.



FIG. 33 DICLFA7575G



FIG. 34 DICLFA9090G



FIG. 35 DICLFA1212G



FIG. 36 DICFOD7676G



FIG. 37 DICFOD9191G

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DICLFA7575G	Cover DI 762 x 762mm Hinged Lift Assist	762	762	1035	1035	127	240
DICLFA9090G	Cover DI 914 x 914mm Hinged Lift Assist	914	914	1146	1146	127	310
DICLFA1212G	Cover DI 1219 x 1219mm Hinged Lift Assist	1219	1219	1428	1428	152	455
DICFOD7676G	Cover DI 762 x 762mm Hinged Lift Assist FOD	762	762	1035	1035	127	196
DICFOD9191G	Cover DI 914 x 914mm Hinged Lift Assist FOD	914	914	1146	1146	127	255



CIRCULAR COVERS AND GRATES

Hynds offer a robust hinged Ductile Iron access cover and grate system for use in extra heavy duty loading applications such as Ports, Airports and Freight Hubs.



CIRCULAR COVERS AND GRATES

The SOLO hinged access covers are available as either a solid top or grated cover. These models are specifically designed to suit the higher loadings associated with Ports and Airports. Both are 600mm clear opening and are hinged for easy access. The solid top cover is also locked down for security. Load rated to 900kN.

- Meets the requirements of AS3996:2019
- Manufactured from over 90% recycled materials
- Bolt down capability for security

Note: For lid lifters suitable for the standard key holes of these covers, refer to page 32.



FIG. 38 DICST600F



FIG. 39 DIG600F

Code	Description	Frame			
		C/O Diameter	Outside Diameter	Depth	Weight (kg)
DICST600F	Cover DI 600mm Hinged SOLO	600	850	100	100.3
DIG600F	Grate DI 600mm Hinged SOLO	600	850	100	103.5

GRATES

Our sump and trench grates compliment our range of covers as these are also designed to withstand high loadings.



GRATES

This range of sump and trench grates is designed to withstand extra heavy loads that traditional grates cannot handle.

- Meets the requirements of AS3996:2019
- Manufactured from over 90% recycled materials
- Close tolerances to eliminate movement
- Bolt down capability for security

SUMP GRATES

Available in Class D and Class G, our Sump Grate range caters to a variety of different sump sizes.

CLASS D SUMP GRATES



FIG. 40 DIG3030D



FIG. 41 DIG6045D



FIG. 42 DIG9060D

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DIG3030D	Grate DI 300 x 300mm Sump	300	300	450	410	55	26
DIG6045D	Grate DI 600 x 450mm Sump	600	450	750	560	55	49
DIG6060D	Grate DI 600 x 600mm Sump	600	600	750	710	55	54
DIG9060D	Grate DI 900 x 600mm Sump	880	640	1050	660	80	156
DIG9090D	Grate DI 900 x 900mm Sump	900	960	1060	970	80	234
DIG9012D	Grate DI 900 x 1200mm Sump	880	1280	1050	1300	80	312

CLASS G SUMP GRATES



FIG. 43 DIG6045G



FIG. 44 DIG9060G

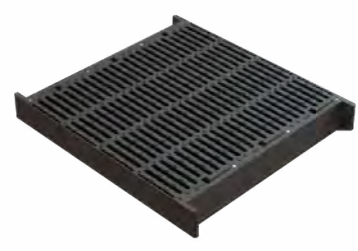


FIG. 45 DIG9090G

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DIG6045G	Grate DI 600 x 450mm Sump	600	450	770	590	80	120
DIG6060G	Grate DI 600 x 600mm Sump	600	600	670	670	80	150
DIG9060G	Grate DI 900 x 600mm Sump	890	640	1090	650	125	236
DIG9090G	Grate DI 900 x 900mm Sump	890	965	1090	975	125	248

NOTE: Larger custom grate sizes may be available on a "made to order" basis

TRENCH GRATES

Trench grates are typically installed on top of concrete channels. They are designed to withstand extra heavy loadings in high traffic environments.

CLASS D TRENCH GRATES



FIG. 46 DITG3010D

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DITG3010D	Grate DI 300 x 1000mm Trench	300	1000	410	1000	50	54

CLASS G TRENCH GRATES



FIG. 47 DITG3060G

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DITG3060G	Grate DI 300 x 600mm Trench	300	600	430	600	78	57

SERVICE BOXES

In intense loading environments where traditional Service Boxes cannot be used, Hynds offer Service Boxes that meet Class G loading requirements.



SERVICE BOXES

These Service Boxes are designed to withstand the Class G loadings seen under intense traffic conditions such as Airports and Ports.

- Meets the requirements of AS3996:2019
- Manufactured from over 90% recycled materials
- Precision machined to seal against gas, air, and water ingress or egress
- Close tolerances to eliminate movement
- Bolt down capability for security



FIG. 48 DISB2222G



FIG. 49 DISB300G

Code	Description	Frame					
		C/O Width	C/O Length	Overall Width	Overall Length	Depth	Weight (kg)
DISB2222G	Service Box DI 225 x 225mm	225	225	411	411	150	54
DISB300G	Service Box DI 300mm Monument (circular)	300		475		200	46

ACCESSORIES

Hynds offer a range of accessories to compliment the Gas and Airtight Covers and Grates.



ACCESSORIES

Our range of lifters are designed specifically for use with Gas and Airtight Covers and Grates. Lifting keyhole plugs are also available as part of the accessory range.

- Meets the requirements of AS3996:2019

LIFTERS & KEYS



FIG. 50 LIDLIFTCMS



FIG. 51 LIDLIFTGLHK



FIG. 52 LIDLIFTGMHK



FIG. 53 LIDLIFTKP



FIG. 54 DIMHLK



FIG. 55 LIDLIFTEJXL750

Code	Description
LIDLIFTCMS	Lid Lifter Crane Mechanical Set-4 Piece
LIDLIFTGLHK	Lid Lifter Long Handle Key
LIDLIFTGMHK	Lid Lifter Seal Breaker Key
LIDLIFTKP	Lid Lifter Key Pack
DIMHLK	Locking Key for Solo Hinged Access Cover and Grate
LIDLIFTEJXL750	EJ Wheeled Manhole Lifter XL750

KEYHOLE PLUGS



FIG. 56 DICPPREC



FIG. 57 DICPSSREC





FIG. 58 DICPPRND

Code	Description
DICPPREC	Plug Plastic Keyhole Rectangular
DICPSSREC	Plug Stainless Steel Keyhole Rectangular
DICPPRND	Plug Plastic Bolt Hole Round

SPECIALISED ACCESS SOLUTIONS CATALOGUE

Issue: 19 August 2026

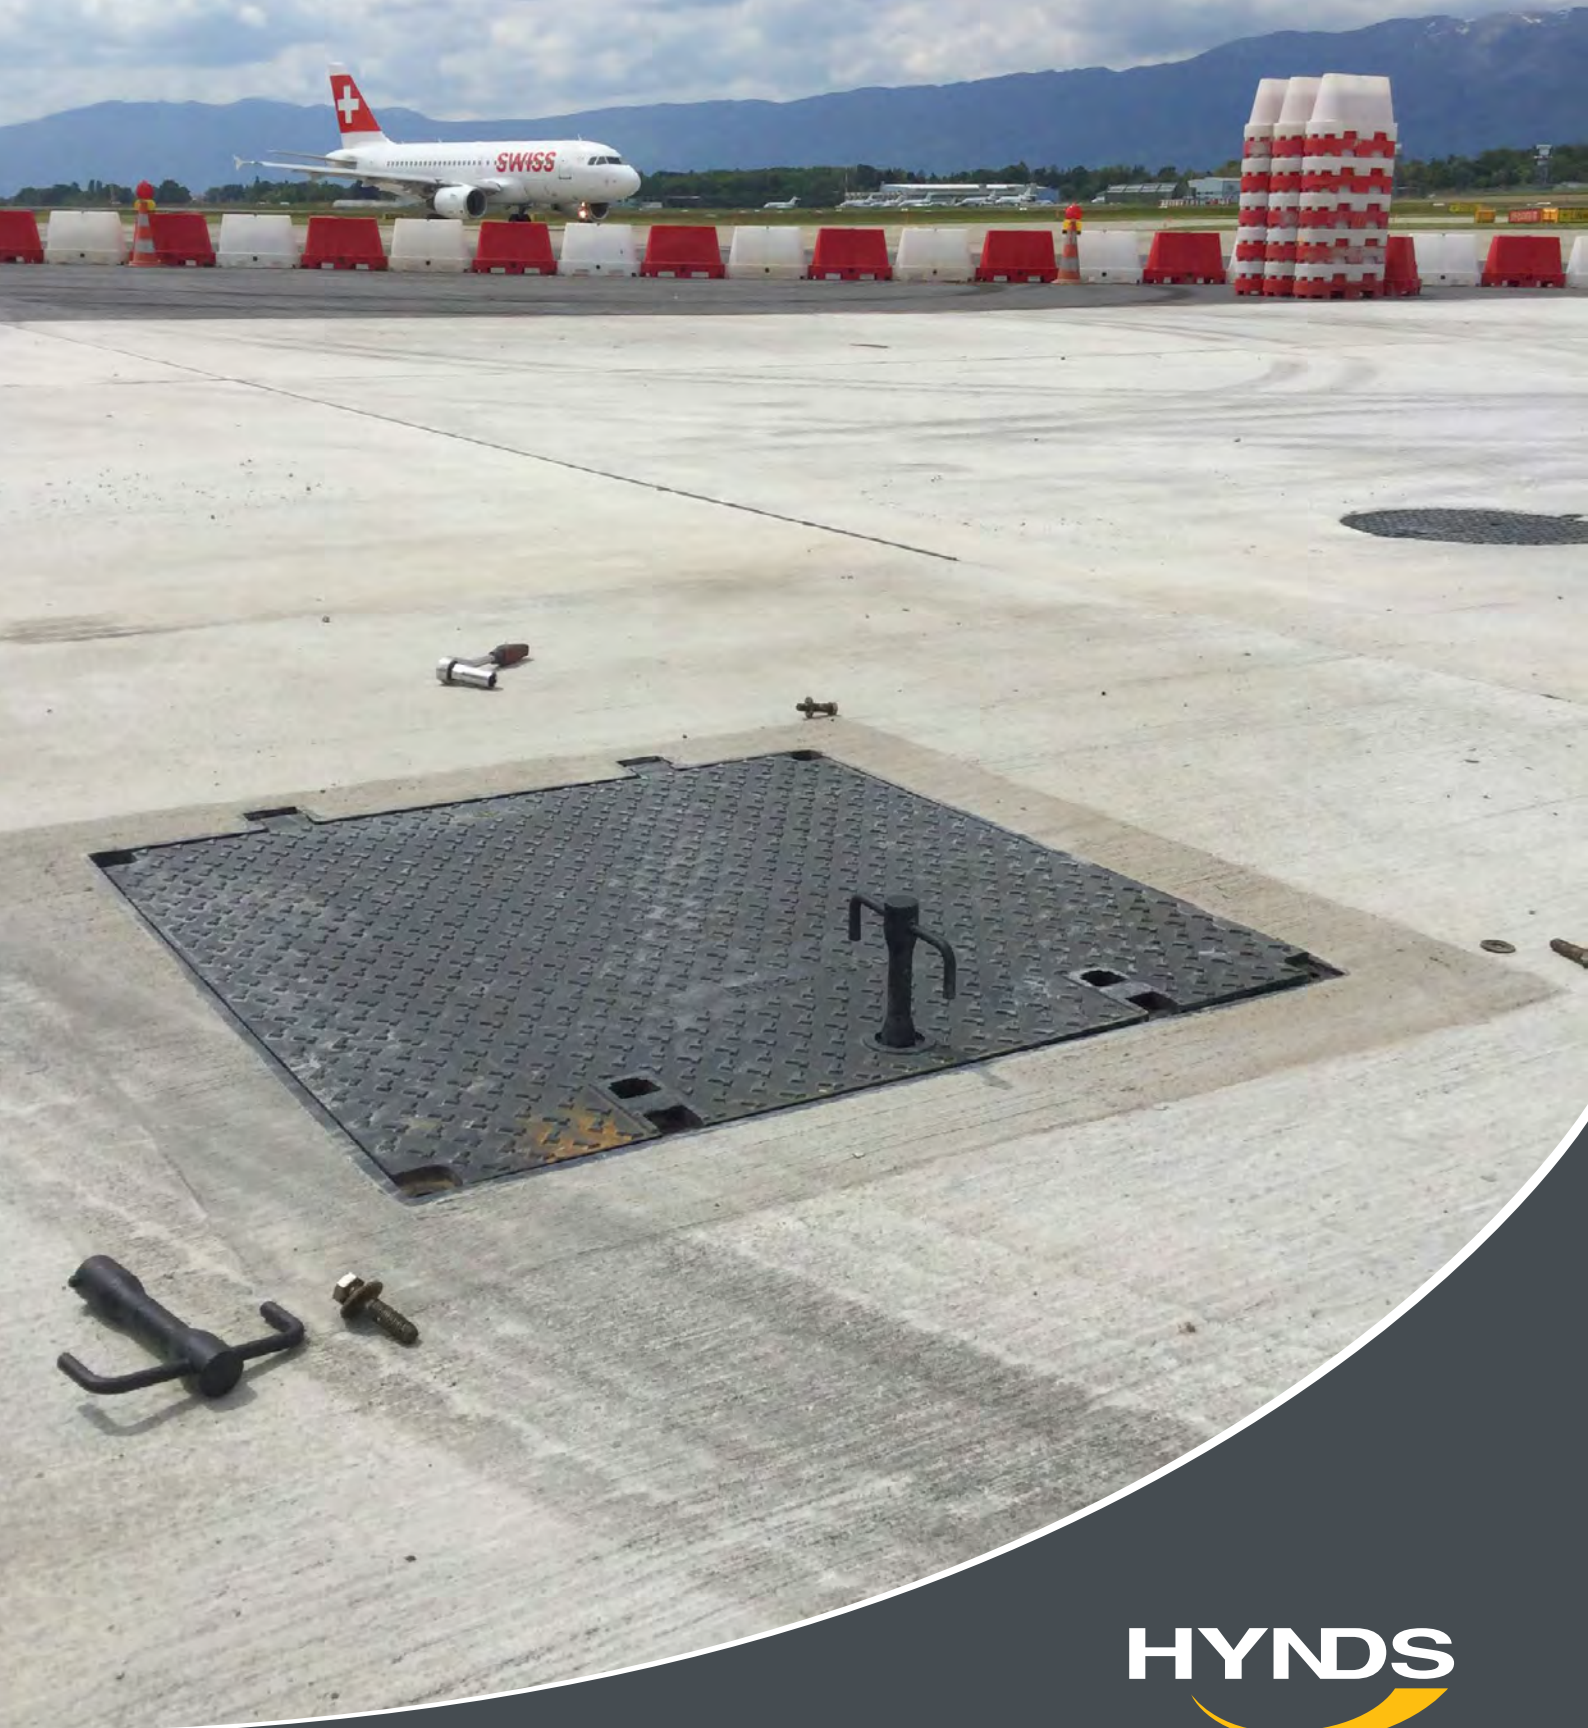

HYNDS